



SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS
REGULATORY, WARNING, AND GUIDE SIGNS




D-754-29

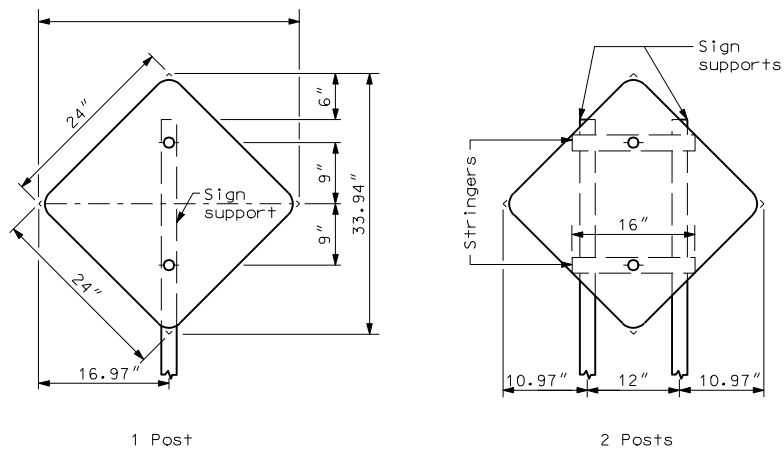



ASSEMBLY NO. 18

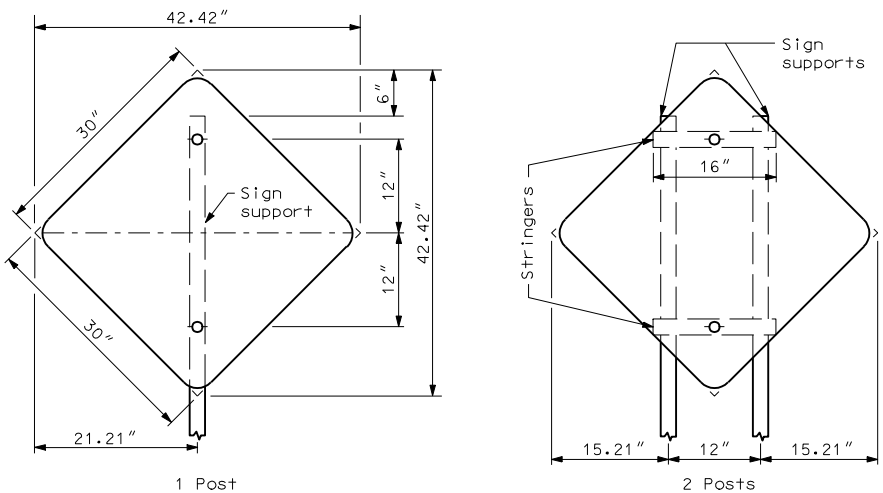


ASSEMBLY NO. 19

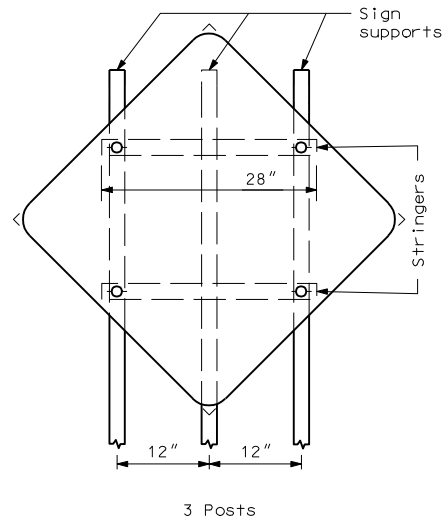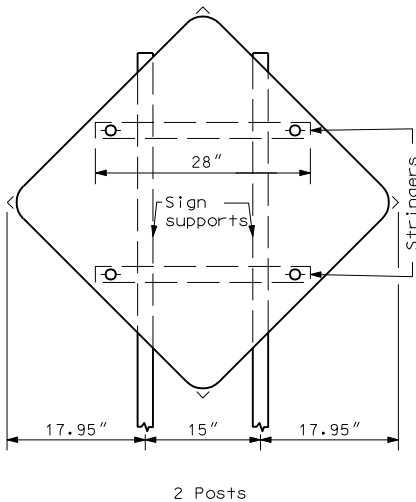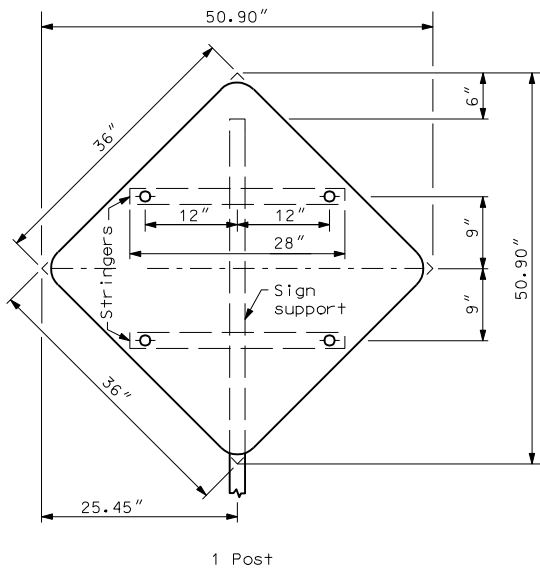

ASSEMBLY NO. 20

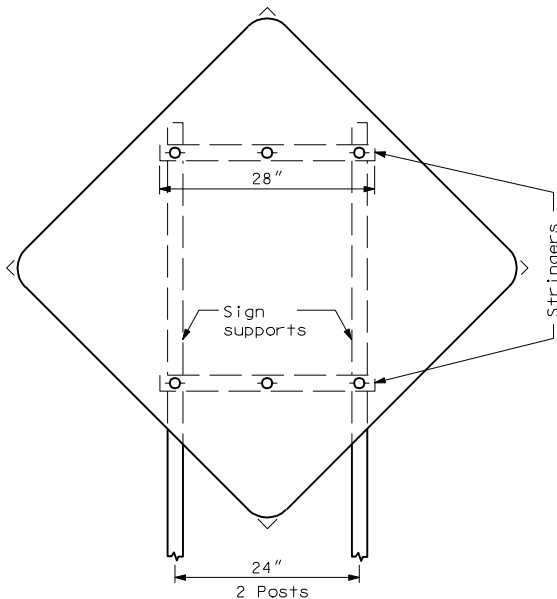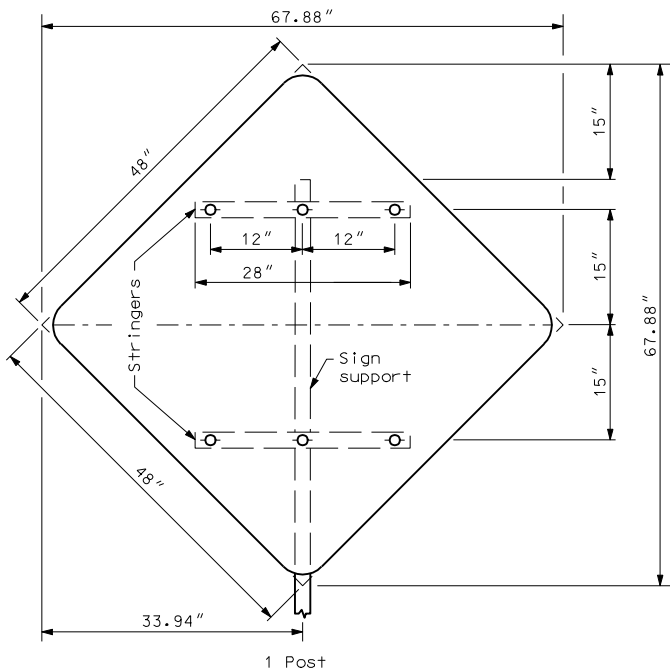

ASSEMBLY NO. 21

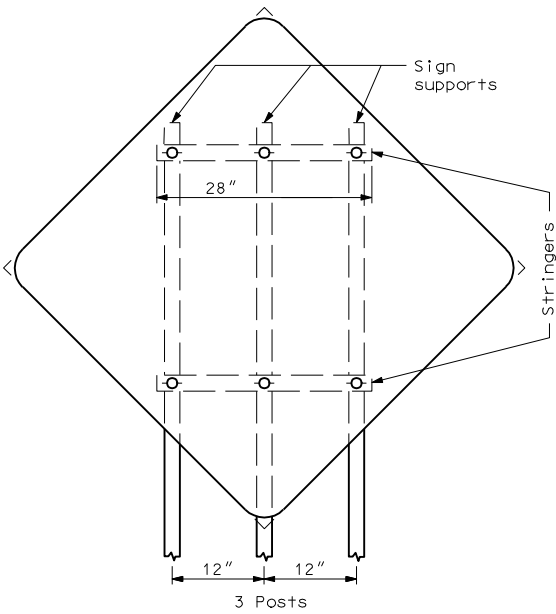

NOTES:

1. See standard D-754-24 for mounting details.
2. The minimum sign backing material thickness shall be 0.100 inch.
3. Perforated square tube stringer shall be 1½" x 1½".
4. All holes shall be punched round for ¾" bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-1-86	
REVISIONS	
DATE	CHANGE
05-01-92	General revisions
07-14-95	46" Stringer
04-16-01	Layout revision
05-21-01	Assembly 20 revision
10-13-04	Note revisions
12-01-04	PE Stamp added

This document was originally issued and sealed by MARK S GAYDOS, Registration Number PE-4518, on 12/01/04 and the original document is stored at the North Dakota Department of Transportation